

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

VIDEO AMPLIFIER WITH INTEGRATED DC LEVEL SHIFTING

This application claims the benefit of U.S. provisional application serial no. 60/102,429 filed September 30, 1998, which is hereby incorporated herein by reference.

BACKGROUND OF THE DISCLOSURE10 **1. Field of the Invention**

The invention relates to television receivers and, more particularly, the invention relates to a video amplifier for a television receiver.

15 **BACKGROUND OF THE INVENTION**

In modern television receivers, a microprocessor provides command and control information through an I²C bus interface to provide various control functions. The I²C bus is coupled to a module (an IF integrated circuit) comprising a tuner, IF, and stereo decoder. To achieve the best picture and sound performance, the microprocessor may control 8 or more alignment functions and various switch functions through the I²C bus interface. These functions provide factory alignment of various signal characteristics such as video output amplitude and dc-level, RF AGC delay threshold, and the like. Such electronic alignment is performed to ensure that a consistent picture quality between televisions occurs in retail show rooms; to ensure that consistent picture equality results between inputs of a television with multiple tuners or multiple auxiliary inputs; and to maintain signal levels within dynamic range limitations of the receiver circuitry.

One aspect of electronic signal alignment control that is not presently addressed in the art is the ability to control the DC level of a video signal that is produced by an IF integrated circuit. Such a signal alignment feature enables the IF integrated circuit to be matched to down

stream circuits such that the IF integrated circuit can be used in a greater number of television receivers.

Therefore, there is a need in the television receiver art for an economical solution that enables a system
5 microprocessor to control the DC level of a video signal.

SUMMARY OF THE INVENTION

The present invention is a method and apparatus within
10 a television receiver for electronically aligning signals within the receiver by controlling the DC level of a video signal. The television receiver comprises a IF integrated circuit that provides a tuner, IF and stereo decoder. The invention uses a digital-to-analog converter (DAC)
15 integrated circuit to control a DC level produced by a video amplifier that is coupled to the output of the IF integrated circuit. In one embodiment of the invention, a system microprocessor is coupled through an I²C bus to a DAC that controls the video amplifier. The video amplifier
20 comprises a DC video level circuit that applies a DC level to the amplified video signal. Additionally, the video amplifier is a non-inverting amplifier such that the output of the IF integrated circuit is polarity matched to downstream circuitry.

25

BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention can be readily understood by considering the following detailed
30 description in conjunction with the accompanying drawings, in which:

FIG. 1 depicts a portion of a television receiver that is arranged in accordance with the present invention;

FIG. 2 is a schematic diagram of a non-inverting video
35 amplifier with DC level control; and

FIG. 3 is a graph of the video output sync-tip Dc level versus the register value of the DAC produced by the video amplifier of FIG. 2.

To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.

5 DETAILED DESCRIPTION

FIG. 1 depicts a block diagram of a portion 100 of a television receiver comprising a signal processing module 106 as well as components of the present invention that support the operation of the module 106. The module 106 is known as an IF integrated circuit that performs video signal processing upon a television signal to produce a baseband video signal. The baseband video signal is amplified by a video amplifier 120 in accordance with the present invention. Specifically, the video amplifier 120 contains DC level shifting circuit that enables the DC level of the output video signal to be controlled by a system microprocessor 158 such that the video signal can be electronically aligned.

More specifically, the signal processing module 106 is, for example, a model LA7577N IF integrated circuit manufactured by Sanyo Corporation. The module 106 comprises an IF circuitry for both sound (SIF) and picture (PIF). The audio circuitry portion 154 of the module 106 comprises an SIF amplifier 146 and SIF AGC 148, down converter 147 (mixer), a limiting amplifier 150 and an FM detector 152. Supporting the audio circuitry 154 is a 4.5 MHz bandpass filter 108. The audio circuitry 154, although it is a part of the television receiver module 106, forms no part of the present invention.

The video portion 156 of the module 106 comprises a PIF amplifier 134, a video detector 132, a phase detector 130, a voltage controlled oscillator 140, an internal video amplifier 138, an equalization amplifier 144, a Nyquist slope canceller 142, an APC switch 128, a lock detector 124, and IF AGC circuit 126 and an RF AGC amplifier 122. Supporting the video portion 156 of the module 106 is a PIF saw filter 102, a phase lock loop filter 104, a PIF AGC

filter 118 and an external video amplifier 120 at the output of the module 106, as well as a sound trap 110 and a video level circuit 112. The IF video input is coupled to the PIF SAW filter 102 that filters the video signal. The SAW filtered video is amplified in IF amplifier 134, then down converted to baseband using the video detector 132. The video detector 132 is driven by the voltage controlled oscillator (VCO) 140. The baseband video is amplified by internal video amplifier 138. The amplified signal is filtered by the sound trap 110 and applied to the input of the video level control circuit 112. The operation of the video level circuit affects the IF AGC 126 which in affects the gain of the PIF amplifier 134 and, thus, the video signal amplitude. The output of the video level control circuit 112 is applied to the equalization amplifier 144 to control the amplitude of the video signal. The output of the equalization amplifier 144 is further amplified by video amplifier 120 to form the video output signal. The output of the PIF AGC filter is coupled to the lock detector 124 that drives the APC switch 128. The APC switch 128 selects the mode of operation for the PLL loop filter, i.e., whether the filter is operated in broad band mode (used during signal acquisition) or narrow band mode (used after PLL lock). The system microprocessor 158 couples digital control signals to a plurality of DACs 114 (e.g., eight DACs in a single integrated circuit package such as a TDA8444 manufactured by Philips Corporation) that, in turn, control the operation of various aspects of the IF module 106 and, in particular, control the level circuit 112, the PIF mute 116, and the video amplifier 120.

It is important to note that the video level circuit within the IF AGC loop and the IF amplifier gain is set by detecting the sync-tip level. As such, a change in the DC level of the video signal, as performed by the level circuit 112, changes the sync-tip level and the IF AGC loop gain. Consequently, a change in DC level by the level circuit 112 controls the amplitude of the video signal. A detailed discussion of the level circuit 112 and the PIF

mute circuit appears in PCT patent application number _____, filed simultaneously herewith, (Attorney Docket Number 89203) and incorporated herein by reference.

The specific interconnections shown in FIG. 1 are representative of the interconnections within the LA7577N module 106. Those skilled in the art will realize that the inventive use of the video amplifier 120 described in detail below could be used in many other video processing applications.

FIG. 2 depicts a schematic diagram of a non-inverting video amplifier 120 in accordance with the present invention. The video input signal is produced at the output pin 21 of the IF integrated circuit such as the LA7577 shown in FIG. 1. The video amplifier 120 is employed as the external video amplifier connected to the video output terminal of the IF integrated circuit. This amplifier provides both video signal amplification and DC level shifting of the amplified video signal.

The video signal is applied to resistor R210 that couples the signal to transistor Q202 (input buffer). Transistor Q206 forms an output buffer for the video amplifier 120. Resistor R214, capacitor C228, and capacitor C224 are used to filter the power supply voltage. Resistor R220 and resistor R222 set the base of transistor Q204 to a constant voltage above the maximum video input signal level. The amplifier voltage gain of the common base amplifier 244 (comprising transistor Q204, resistor R216, resistor R212, resistor R218, resistor R220, resistor R222 and capacitor C226) is equal to the ratio of R218/R212. The DC level of the video output signal is determined by the DC current through resistor R218, which is adjusted by stealing current with the constant current source of transistor Q208. The control voltage from a DAC 114 is attenuated and filtered by resistor R242 and R240, and capacitors C238 and C236. The filtered control signal is coupled to the amplifier 244 through a current source 246 comprising transistor Q208 and resistors R234 and R232.

In operation, as the DAC output voltage increases, transistor Q208 collector current increases, the DC current through R218 decreases and thus the video output DC level decreases. The relationship 300 between the output DC
5 voltage of the video amplifier in response to the DAC output voltage is depicted in FIG. 3, where the horizontal axis 302 is control voltage (DAC values) and the vertical axis 304 is the sync tip level voltage level (video DC level).

10 By way of example, the video input sync tip level production spread is 3.01 to 4.15 VDC, while the video output requirement is 2.5 ± 0.5 VDC. The DC level adjustment was designed to set the video output sync tip level to 2.5 ± 0.1 VDC. The desired amplifier gain was
15 1.65 which was achieved by setting R218 and R222 to 3300 and 2000 ohms, respectively.

The ratio of R220/R222 is set to equal the ratio of R222/R212 to optimize the power supply ripple rejection. If the two ratios are equal, the output is not affected by
20 relatively small changes in the power supply voltage. This is important because the low pass filter formed by R214, C224 and C228 have little to no effect at very low frequencies. Although the output buffer Q206 is shown as an PNP transistor and NPN transistor could also be used.
25 Lastly, C226 can be used to provide additional noise filtering and/or compensate for Q204 junction capacitance to improve the video bandwidth of the circuit.

The present invention provides circuitry that facilitates television receiver signal alignment using a
30 system microprocessor to control the signal alignment operation through the system I²C bus. The circuitry includes a non-inverting video amplifier having a controlled DC level. As such, the inventive circuitry provides additional signal alignment functionality during
35 factory alignment and testing through the television receiver system's existing microprocessor and I²C bus. The video amplifier amplifies in a non-inverting manner such that the output of the IF integrated circuit module, after

amplification and level shifting, remains compatible with down stream circuitry that expects a certain polarity video signal.

Although various embodiments which incorporate the
5 teachings of the present invention have been shown and described in detail herein, those skilled in the art can readily devise many other varied embodiments that still incorporate these teachings.

What is claimed is:

1. A video amplifier comprising:
 - an input buffer;
 - 5 an amplifier coupled to said input buffer;
 - an output buffer coupled to said video amplifier; and
 - a DC level control circuit coupled to said video amplifier.
- 10 2. The apparatus of claim 1 wherein said amplifier further comprises:
 - a transistor connected in a common-base configuration.
3. The apparatus of claim 1 wherein said amplifier is a
15 non-inverting amplifier.
4. The apparatus of claim 1 wherein said DC level control circuit comprises:
 - a current source that controls a current through said
20 amplifier in response to said control signal.
5. The apparatus of claim 2 wherein said transistor has a base that is connected to ground through a capacitor.
- 25 6. The apparatus of claim 2 wherein said transistor has a collector coupled through a first resistor to said input buffer amplifier and an emitter coupled through a second resistor to ground, where a first ratio of a value of said second resistor to a value of said first resistor
30 establishes the amplifier gain.
7. The apparatus of claim 2 wherein said transistor has a base and a third resistor coupled from said base to a power supply and a fourth resistor coupled from said base to
35 ground, where a second ratio of said third resistor to said fourth resistor is equal to said first ratio.

8. Apparatus for aligning signals in a television receiver comprising:

an IF integrated circuit for processing a television signal and producing a video signal;

5 a non-inverting video amplifier, coupled to said IF integrated circuit to amplify said video signal;

a controller, coupled to said non-inverting video amplifier, for controlling a DC level of said amplified video signal.

10

9. The apparatus of claim 8 wherein said controller comprises:

a microprocessor;

a digital-to-analog converter; and

15 a bus coupling said microprocessor to said digital-to-analog converter.

10. The apparatus of claim 8 wherein said non-inverting video amplifier further comprises:

20 an input buffer;

an amplifier coupled to said input buffer;

an output buffer coupled to said amplifier; and

a DC level control circuit coupled to said amplifier.

25 11. The apparatus of claim 10 wherein said amplifier further comprises:

a transistor connected in a common-base configuration.

12. The apparatus of claim 10 wherein said DC level control circuit comprises:

30 a current source that controls a current through said amplifier in response to said control signal.

13. The apparatus of claim 11 wherein said transistor has
35 a base that is connected to ground through a capacitor.

14. The apparatus of claim 11 wherein said transistor has a collector coupled through a first resistor to said input

buffer amplifier and an emitter coupled through a second resistor to ground, where a first ratio of a value of said second resistor to a value of said first resistor establishes the amplifier gain.

5

15. The apparatus of claim 11 wherein said transistor has a base and a third resistor coupled from said base to a power supply and a fourth resistor coupled from said base to ground, where a second ratio of said third resistor to
10 said fourth resistor is equal to said first ratio.

16. A method of aligning a signal in a television receiver comprising the steps of:

providing a video signal from an IF integrated
15 circuit;
generating a control signal for a video amplifier that is coupled to the output of said IF integrated circuit;
coupling the control signal to a DC level shifting circuit in said video amplifier;
20 amplifying said video signal and shifting a DC level of said amplified video signal in response to the control signal.

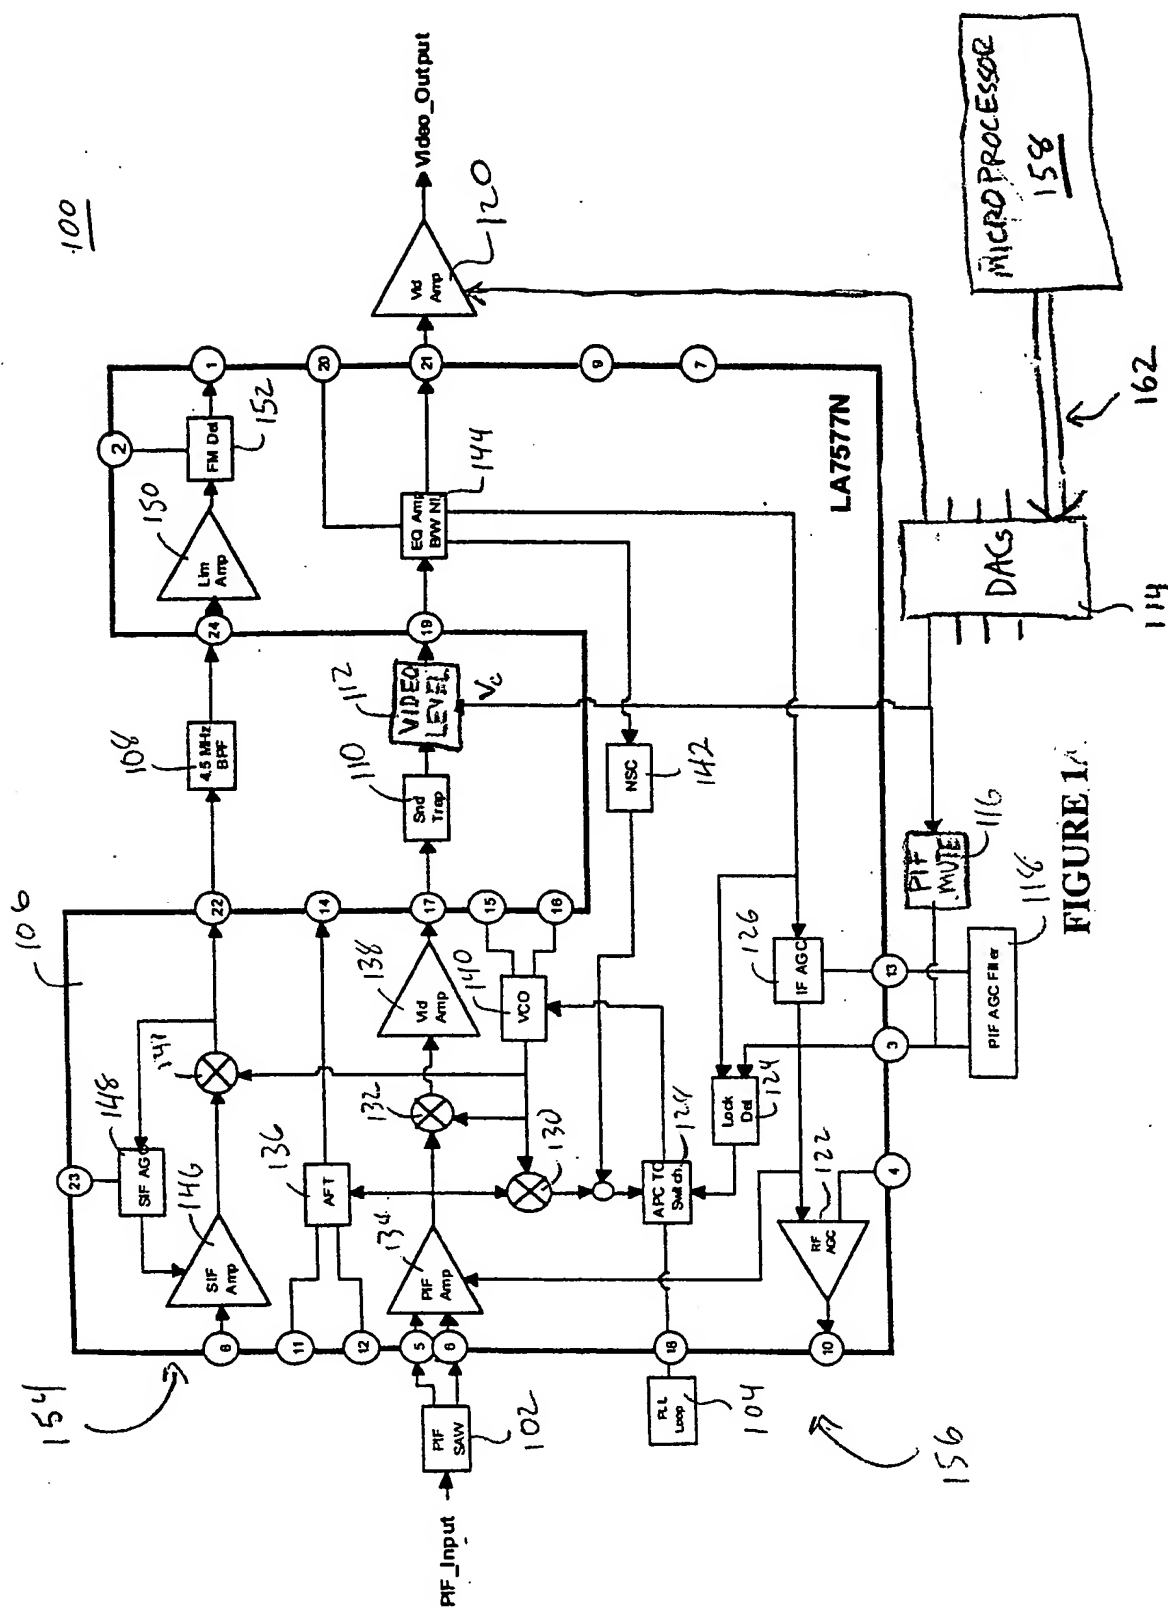


FIGURE 1A

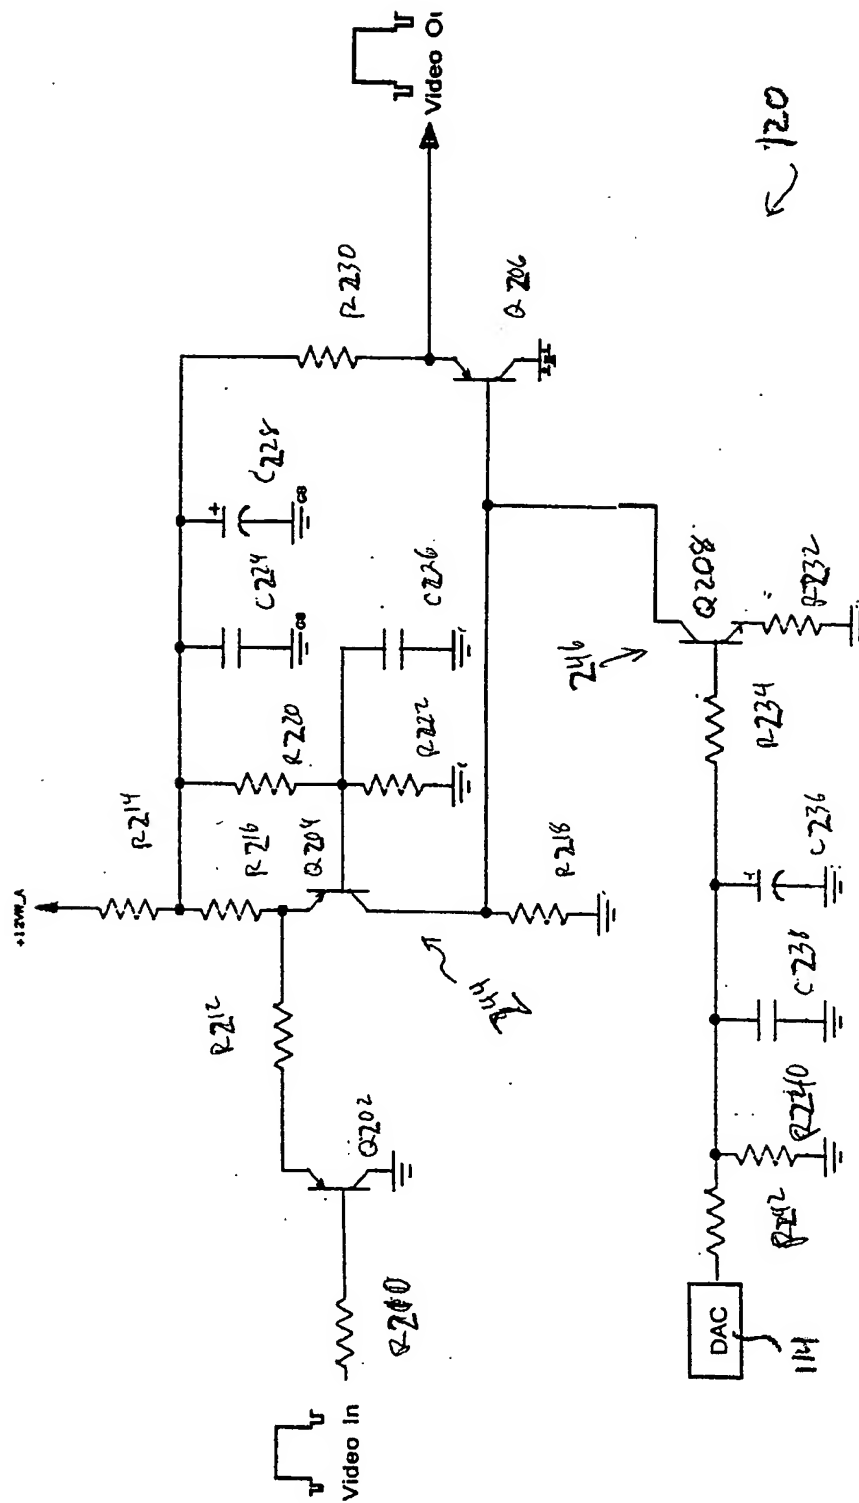


FIGURE 2

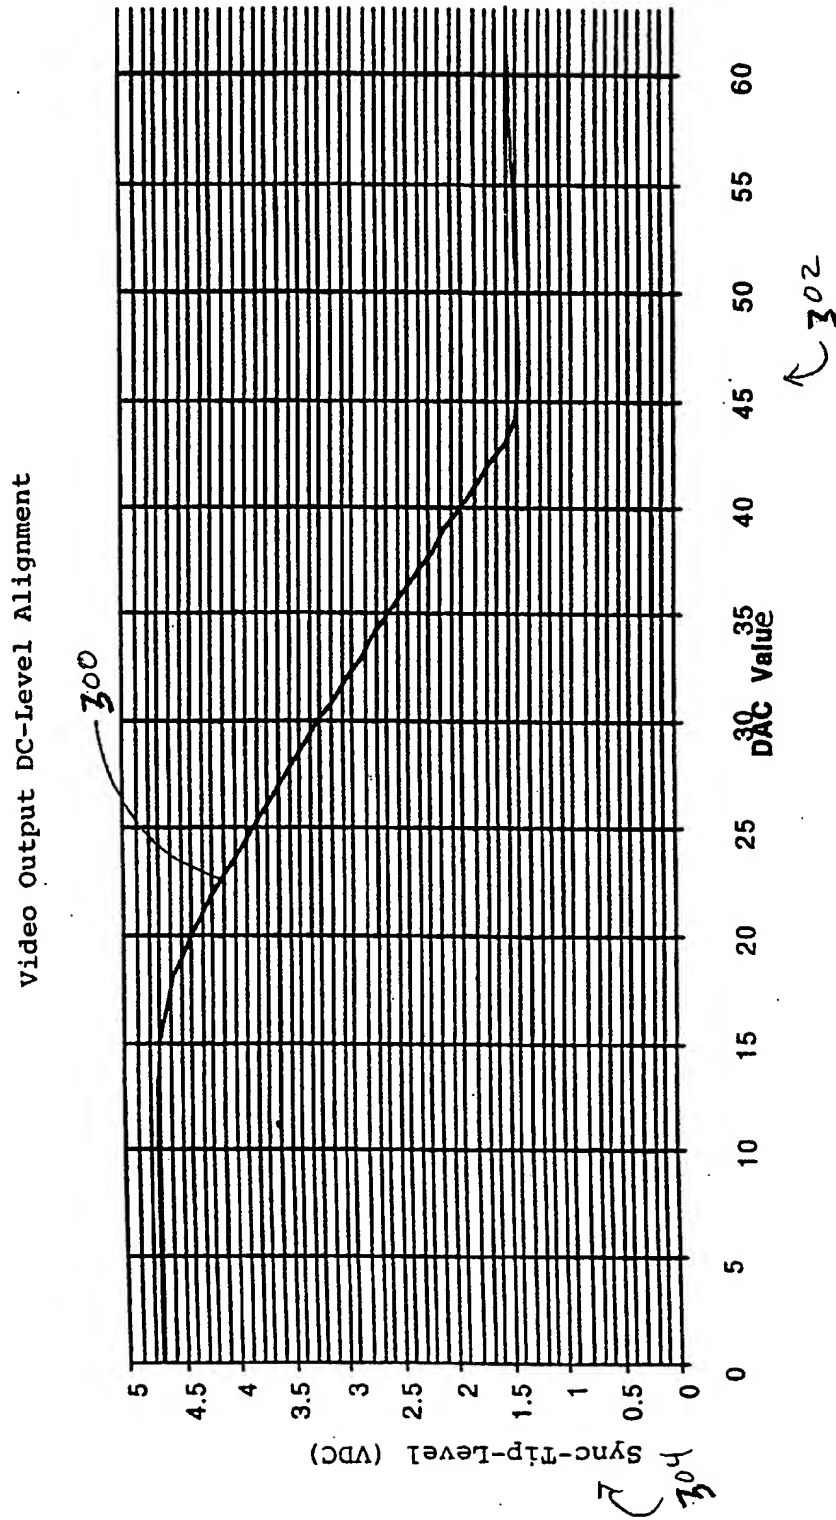


FIGURE 3

Inter nal Application No
PCT/US 99/22759

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Inter nal Application No
PCT/US 99/22759

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 757 239 A (STARKEY C.) 12 July 1988 (1988-07-12) the whole document. ----	6-13,16
A	WO 98 32279 A (DISPLAY LABORATORIES INC.) 23 July 1998 (1998-07-23) page 14, line 8 -page 19, line 8 ----	6-13,16
A	EP 0 567 343 A (ORION ELECTRIC CO. LTD.) 27 October 1993 (1993-10-27) the whole document ----	6-13,16
A	YAMAMOTO Y. ET AL: "A NEW VIDEO PROCESSOR FOR COLOR TV" IEEE TRANSACTIONS ON CONSUMER ELECTRONICS., vol. 34, no. 3, 1 August 1988 (1988-08-01), pages 443-450, XP000002720 IEEE INC. NEW YORK., US ISSN: 0098-3063 the whole document ----	6-13,16
A	SUZUKI M. ET AL: "Computer-Controlled Alignment for a 2000-Line Color Monitor" 1989 SID INTERNATIONAL SYMPOSIUM. DIGEST OF TECHNICAL PAPERS, BALTIMORE, MD, USA, SOCIETY OF INFORMATION DISPLAY, USA, 31 October 1989 (1989-10-31), pages 196-199, XP000076865 the whole document -----	6-13,16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/22759

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4442458 A	10-04-1984	NONE	
US 4706108 A	10-11-1987	JP 2054137 C	23-05-1996
		JP 7089673 B	27-09-1995
		JP 61237589 A	22-10-1986
		JP 61237588 A	22-10-1986
		AT 86424 T	15-03-1993
		CA 1282858 A	09-04-1991
		DE 3687849 A	08-04-1993
		EP 0198692 A	22-10-1986
EP 359493 A	21-03-1990	US 4864386 A	05-09-1989
		DE 68921272 D	30-03-1995
		DE 68921272 T	12-10-1995
		DK 446789 A	13-03-1990
		JP 2109494 A	23-04-1990
US 5311295 A	10-05-1994	DE 4412416 A	13-10-1994
		GB 2277222 A,B	19-10-1994
		JP 2976168 B	10-11-1999
		JP 6303648 A	28-10-1994
US 4757239 A	12-07-1988	CA 1274027 A	11-09-1990
		EP 0243457 A	04-11-1987
		WO 8702508 A	23-04-1987
WO 9832279 A	23-07-1998	AU 6239098 A	07-08-1998
EP 567343 A	27-10-1993	JP 2918388 B	12-07-1999
		JP 5304430 A	16-11-1993
		US 5448288 A	05-09-1995
		CA 2094769 A,C	25-10-1993
		CN 1078837 A	24-11-1993